


TY-type : Model Un-loosening

This is the ideal solution against bolt-loosening by shaking and vibration on the equipment.

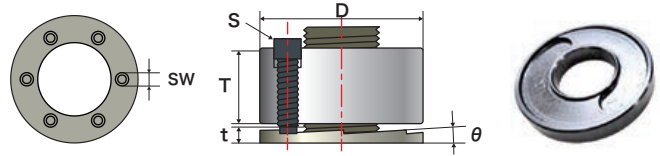

Catalogue No. Bolt-size / Thread-pitch	Generated nominal tension in kN	Max torque to each screw in Nm	Nut body		Slope-Disk		Hertz-Screw			
			D	T	t	Outside-dia.	S	SW	St	No.
M16TY×P2-H4	55	5	38	23	5	38	M6×0.75	5	5	4
M16TY×P2-H6	85	5	38	23	5	38	M6×0.75	5	5	6
M20TY×P2.5-H6	85	5	42	23	5	40	M6×0.75	5	5	6
M20TY×P2.5-H8	110	5	42	23	5	42	M6×0.75	5	5	8
M22TY×P2.5-H6	85	5	44	23	5	44	M6×0.75	5	5	6
M22TY×P2.5-H8	110	5	44	23	5	44	M6×0.75	5	5	8
M24TY×P3-H8	110	5	46	23	5	46	M6×0.75	5	5	8
M24TY×P3-H6	210	30	52	32	5	50	M8×1	6	6	6
M27TY×P3-H6	210	30	54	32	6	54	M8×1	6	6	6
M27TY×P3-H8	270	30	54	32	6	54	M8×1	6	6	8
M30TY×P3.5-H6	210	30	57	32	6	56	M8×1	6	6	6
M30TY×P3.5-H8	270	30	57	32	6	57	M8×1	6	6	8
M33TY×P3.5-H8	270	30	62	32	6	61	M8×1	6	8	8
M33TY×P3.5-H6	300	50	67	40	8	67	M10×1.25	8	8	6
M36TY×P4-H6	300	50	70	40	8	69	M10×1.25	8	8	6
M36TY×P4-H8	410	50	70	40	8	70	M10×1.25	8	8	8
M39TY×P4-H8	410	50	74	40	8	74	M10×1.25	8	8	8
M39TY×P4-H10	530	50	74	40	8	74	M10×1.25	8	8	10
M42TY×P4.5-H8	410	50	77	40	8	77	M10×1.25	8	8	8
M42TY×P4.5-H12	610	50	77	40	8	77	M10×1.25	8	8	12
M45TY×P4.5-H8	600	80	86	50	8	85	M12×1.25	10	10	8
M45TY×P4.5-H10	740	80	86	50	8	85	M12×1.25	10	10	10
M48TY×P5-H8	600	80	90	50	8	86	M12×1.25	10	10	8
M48TY×P5-H10	740	80	90	50	8	90	M12×1.25	10	10	10
M52TY×P5-H8	600	80	94	50	10	94	M12×1.25	10	10	8
M52TY×P5-H12	890	80	94	50	10	94	M12×1.25	10	10	12
M56TY×P5.5-H8	600	80	100	50	10	96	M12×1.25	10	10	8
M56TY×P5.5-H12	890	80	100	50	10	96	M12×1.25	10	10	12
M60TY×P5.5-H8	1000	200	112	64	12	110	M16×1.5	14	13	8
M60TY×P5.5-H10	1250	200	112	64	12	110	M16×1.5	14	13	10
M64TY×P6-H8	1000	200	115	64	12	114	M16×1.5	14	13	8
M64TY×P6-H10	1250	200	115	64	12	114	M16×1.5	14	13	10
M68TY×P6-H8	1000	200	122	64	12	122	M16×1.5	14	13	8
M68TY×P6-H12	1480	200	122	64	12	122	M16×1.5	14	13	12
M72TY×P6-H8	1000	200	126	64	12	126	M16×1.5	14	13	8
M72TY×P6-H12	1480	200	126	64	12	125	M16×1.5	14	13	12
M76TY×P6-H12	1480	200	131	64	12	131	M16×1.5	14	11	12
M76TY×P6-H16	2000	200	155	64	12	155	M16×1.5	14	11	16
M80TY×P6-H12	1480	200	135	64	12	135	M16×1.5	14	11	12
M80TY×P6-H16	2000	200	155	78	12	155	M16×1.5	14	11	16
M85TY×P6-H12	1480	200	140	64	12	140	M16×1.5	14	11	12
M85TY×P6-H16	2000	200	155	78	12	155	M16×1.5	14	11	16
M90TY×P6-H12	1480	200	145	64	12	145	M16×1.5	14	11	16
M90TY×P6-H16	2000	200	155	78	12	155	M16×1.5	14	11	18
M100TY×P6-H16	2000	200	170	78	12	170	M16×1.5	14	11	16
M100TY×P6-H18	2220	200	175	78	12	175	M16×1.5	14	11	18
M110TY×P6-H18	2220	200	175	78	12	175	M16×1.5	14	11	18
M110TY×P6-H20	2470	200	190	78	12	190	M16×1.5	14	11	20

★Imperial thread products are available.