


TZ-type : Bolzero Washer

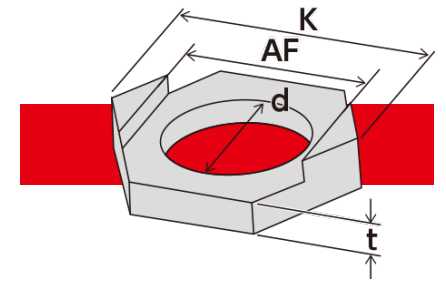

(mm)

Catalogue No. / Bolt-size	Width	Bore diameter	Thickness	Max. dimension	Non-Rotation Rate*
	AF	d	t	K	
TZ-M14	22	14.5	4	30	1.57
TZ-M16	24	16.5	5	33	1.62
TZ-M18	27	19	5	37	1.59
TZ-M20	30	21	6	40	1.58
TZ-M22	32	22.5	6	44	1.59
TZ-M24	36	25	6	53	1.55
TZ-M27	41	28	6	58	1.55
TZ-M30	46	31	6	62	1.57
TZ-M33	50	34	6	67	1.57
TZ-M36	55	37	8	77	1.52
TZ-M39	60	40.5	8	81	1.57
TZ-M42	65	43.5	8	89	1.57
TZ-M45	70	46.5	8	98	1.58
TZ-M48	75	49.5	8	104	1.57
TZ-M52	80	54	10	110	1.55
TZ-M56	85	58	10	115	1.56
TZ-M60	90	62	12		1.55
TZ-M64	95	66	12		1.55
TZ-M68	100	70	12		1.54
TZ-M72	105	74	12		1.54

Material : S45C + Electro zinc plating

The operating temperature ~150°C

*The non-rotation rate represents the washer's resistance to rotation, and the value for a standard washer is 1.0.